

Upward Seepage at the Downstream Toe of Hydraulic Structures External Suffosion / Fluidisation

Ahmed Khaddour

Institute of Forensic Engineering, Faculty of Civil Engineering,
 University of Technology Brno, Žižkova 17, 602 00 Brno, Czech Republic

Abstract: Embankment dams are made of earth and rock material and represent the most common dam type worldwide. One of the most common failure scenarios of embankment dams start with internal erosion. Problems associated with filtration and soil stability therefore play an important role in the design or rehabilitation of water structures. Filtration stability and deformation of soil due to seepage is reflected in the economic and safety assessment of these structures. On the subject of various aspects related to the stability and deformation of soils with respect to groundwater flow considerable number of works was developed worldwide.

Key words: External suffosion • Fluidisation • Critical hydraulic gradient

INTRODUCTION

External fluidization-Suffosion at Non Coherent Soil:

The upward seepage at the downstream toe of hydraulic structures such as dams or levees (Fig. 1) can result in the initiation of internal erosion of non-cohesive soils at the base. The theoretical analyses carried out by numerous authors have lead to the evaluation of the threshold velocity of filtration (specific discharge) and the hydraulic gradient as criteria for the initiation of the heave/external suffosion process.

Elementary volume upper right corner in (Fig. 1) is considered at the place of the outflow from a porous medium. The state of equilibrium is assumed then the sum of all vertical forces acting on the volume has to be equal to zero. Following expressions are using notation from (Fig. 2). Then the state of equilibrium can be expressed as $\Sigma S = 0$.

The “passive” (downward) vertical force consists of following components:

- Hydrostatic pressure force acting on the upper surface of the elementary volume... S_1
- Weight of the porous medium - particles... S_2
- Weight of water in pores... S_3

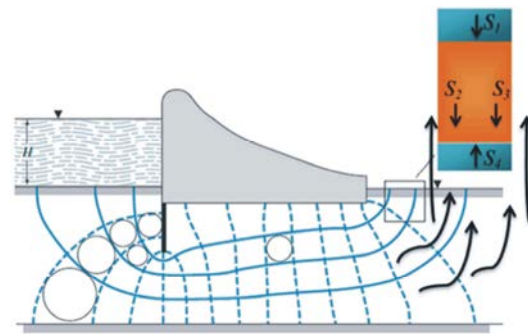


Fig. 1: Flow under a dam including a detail of the upward flow, arranged according to [Budhu, Muni 2007].

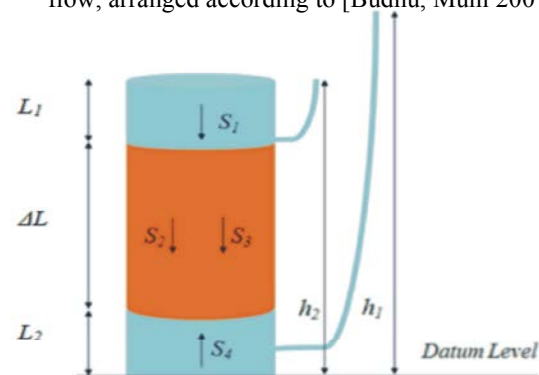


Fig. 2: All vertical forces acting on at the elementary volume.

Corresponding Author: Ahmed Khaddour, Institute of Forensic Engineering, Faculty of Civil Engineering,
 University of Technology Brno, Žižkova 17, 602 00 Brno, Czech Republic.
 E-mail: khaddour@seznam.cz.

The “active” (upward) vertical force S_1 is represented by hydrostatic pressure acting on the lower surface of the elementary volume [1],

Friction at the sides of the elementary volume is neglected in the analysis. The individual forces can be expressed as follows:

$$S_1 = \gamma_w (h_1 - \Delta L - L_2) \cdot A$$

$$S_2 = \gamma_s \cdot \Delta L (1 - n) \cdot A$$

$$S_3 = \gamma_w \cdot n \cdot \Delta L \cdot A$$

$$S_4 = \gamma_w (h_2 - L_2) \cdot A$$

where:

- A Area of cross section of the cylinder [m²] see (Fig. 2),
- h_1 Piezometric head below of soil sample [m],
- h_2 Piezometric head above of soil sample [m],
- n Is soil porosity,
- S_1 Is hydrostatic pressure force,
- S_2 Is weight of the porous medium – particles,
- S_3 Is weight of water in pores,
- S_4 Is vertical force is represented by hydrostatic pressure,
- L_1 Is height of water above of the soil sample [m],
- L_2 Is height of water below of the soil sample [m],
- γ_s Is the soil particle unit weight [N.m⁻³],
- γ_w Is the unit weight of water [N.m⁻³],
- ΔL Is the height of soil in cylinder [m].

The equilibrium state yields:

$$S_4 - S_1 - S_2 - S_3 = 0$$

For equilibrium state at the outflow from a porous medium we define critical hydraulic gradient:

$$J_{crit} = \frac{(h_1 - h_2)}{\Delta L} \quad (1.1a)$$

When substituting from (1.1a) to (1.1b) we obtain well known Terzaghi formula

$$J_{crit} = \frac{(\gamma_s - \gamma_w)}{\gamma_w} (1 - n) \quad (1.1b)$$

where J_{crit} is the critical hydraulic gradient. For porosity $n = 0.38$ and the solid phase unit weight $\gamma_s = 26 \text{ kN/m}^3$, the critical value of hydraulic gradient would be approximately:

$$J_{crit} \approx 1$$

The results of Istomina’s research are frequently used in the practical assessment of the origin of heave/external suffosion in non-cohesive soils during upward seepage. According to Istomina, the critical hydraulic gradient J_{crit} is expressed as a function of the non-uniformity coefficient C_u . However, Istomina’s laboratory results differ significantly in this respect and should be discussed in more detail [1],

In general, the resistance of non-coherent soil against heave/external suffosion is given by:

- The uniformity of the soil - the higher the uniformity, the higher the resistance,
- The compaction of the soil –the higher the compaction, the higher the shear strength and resistance of the soil,
- The shape of particles - round shaped grains are more susceptible to heave / suffosion.

Moreover, during laboratory investigations the methodology used is important; significant factors include the method of embedding the soil into the apparatus, the rate at which the hydraulic gradient is increased, the origin of local failure where the soil is in contact with the glass walls, etc.

Moreover, there are many times when it is extremely difficult to define the symptoms of the “failure,” as a sharp boundary mostly does not exist: firstly, very fine particles are flushed out from the sample, though this has practically no influence on the seepage velocity and hydraulic conductivity, the failure manifests itself both by the boiling of particles and the heaving (due to uplift UPL) of a significant part of the sample.

Some materials were tested for the J_{crit} gradients identified at the moment of failure and for so called “steady” J^s gradients maintained after the disturbance of the soil sample [2]. ‘Steady’ gradients were considered to exist due to the residual “resistivity” of a soil. Even if failure occurred, the soil samples were able to sustain a certain gradient J^s , though this was significantly lower than J_{crit} . Examples of the observed results are shown in (Table 1).

In order to guarantee “safe” design, Istomina firstly plotted the lower envelope of the observed critical gradients J_{crit} as a function of the soil non-uniformity coefficient C_u . According to the requirements of today’s technical standards, such a defined J_{crit} value should be considered as the so-called “standard” soil resistance

Table 1: Resulting critical and “steady” hydraulic gradients [Istomina 1957]

Material	Soil characteristics						Gradients	
	Until failure			After failure			J_{crit}	J^s
	ρ [g/cm ³]	porosity n	d_0 [mm]	ρ [g/cm ³]	porosity n	d_0 [mm]		
Sand 3 – test 11	1.61	0.39	0.069	0.97	0.63	0.333	2.02	0.69
Sand 5 – test 38	1.70	0.36	0.117	1.66	0.37	0.177	1.00	0.80
Sand 4 – test 5	1.89	0.21	0.093	1.82	0.31	0.163	1.15	0.70
Sand 4 – test 44	1.87	0.29	0.083	1.82	0.31	0.126	1.30	0.70
Sand mixture 3 – test 36	1.79	0.32	0.065	1.76	0.33	0.165	2.10	0.72
Sand mixture 3 – test 43	1.85	0.3	0.093	1.82	0.31	0.196	1.60	0.60

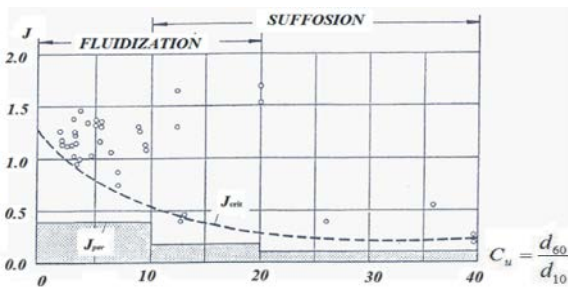


Fig. 3: Plot of $J_{crit} = f(C_u)$ and $J_{per} = f(C_u)$ after [Istomina 1957].

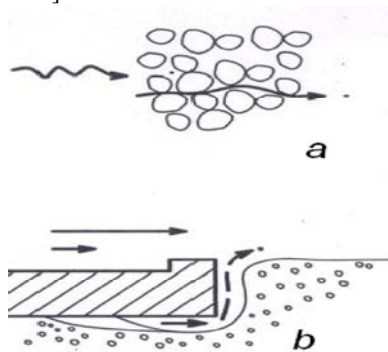


Fig. 4: Example of situations where hydraulic fluidisation might be critical

parameter value (see also below). A safety factor of the magnitude $SF = 1.5 - 2.5$ was intuitively introduced by Istomina into the “design values”, giving the permissible hydraulic gradients J_{per} is listed below (Fig. 3).

The plot in (Fig. 3) shows the measured values and envelope of critical (outflow) hydraulic gradients J_{crit} for various values of C_u , at which no soil failure was observed due to fluidization or suffosion. Based on the experimental data, Istomina recommend the following “safe” permissible hydraulic gradients J_{per} [1],

It must be stated that the values of J_{per} recommended by Istomina were set by experiments with considered safety factor 1.5 to 2.5.

Application on the External Suffosion/ Fluidisation

Problems: When applying the (3.2) to the internal erosion - external suffosion, resp. and fluidisation - the load is represented by hydraulic gradient J , the resistance by the critical gradient J_{crit} . The typical situation of such failure is shown in (Fig. 4) The driving force for suffosion and fluidisation can be expressed via hydraulic gradient J .

Therefore, the limit state condition for the origin of external suffosion/fluidisation is based on comparison of hydraulic gradient J in the soil with its critical value J_{crit} . Both hydraulic gradient J and its critical value J_{crit} suffer from significant uncertainty which should be taken into account during the assessment. In terms of limit state method this is taken into account via partial reliability factors (see below). According to the technical standards the following limit state relation can be proposed [3]:

$$\gamma_{sit} \cdot \gamma_n \cdot \gamma_{fa} \cdot J \leq \gamma_{stf} \cdot \gamma_{fp} \cdot J_{crit}$$

where γ_{sit} is performance factor, γ_n is importance factor of the hydrotechnic structure, J is local hydraulic gradient, J_{crit} critical hydraulic gradient, γ_{fa} is the load reliability factor given by the method of hydraulic gradient determination, e.g.:

- Using the in situ measurements

$$\gamma_{fa} = 1.1,$$

- by hydraulic calculation

$$\gamma_{fa} = 1.2,$$

- Estimated

$$\gamma_{fa} \geq 1.3.$$

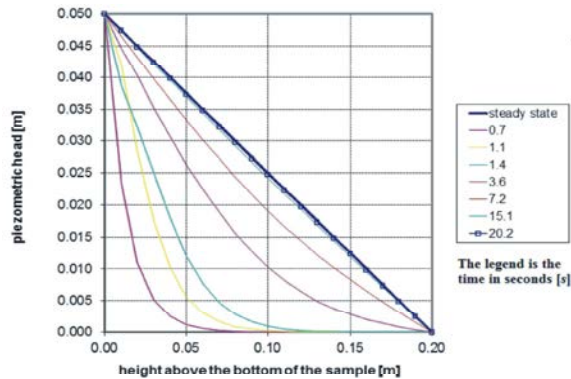


Fig. 6: The time which we need to have a steady state between piezometric head and height above the bottom of the sample.



Fig. 7: The disruption of the specimen starts with single “cracks” (heave) due to the uplift force - experiment 1.



Fig. 8: The finishing by complete total collapse

sharp boundary of the disruption. Moreover the experience from the research shows differences in disruption mode for compacted and not compacted material. In case of compacted soil the disruption of the

specimen starts with single “cracks” (heave) due to the uplift force UPL (Fig. 7) and finishes by complete total collapse (Fig. 8). [1].

Further on test of the influence of determination the disruption border was carried out as the part of the research. During the experiments No. 1, 2, 6, 7 and 8 the total collapse (Fig. 8) was considered as governing phenomena for the critical gradient reading, at the experiments 3 and 4 the initial flush out of fines was regarded as the critical state (Fig. 7). These led to significantly different results in assessed hydraulic gradients (see explanation below).

During the test the changing height of the sample and the changes in the colour or shape of the top layer of water cylinder was also observed. At the same time turbidity in water due to flushing out fine particles was visually monitored. The change in the soil structure was indicated also by the fluctuations of piezometric head measured in the apparatus. All these observations were recorded and stored in the computer, where all corresponding variables (piezometric head, hydraulic gradient, hydraulic conductivity) were evaluated and checked continuously during the test. It was found out that during the gradual collapse hydraulic conductivity increased considerably.

Such derived critical hydraulic gradients found out at each test were put in the database and subjected to statistical analysis.

Comparison of Experimental

Results with Values of Other Authors: The values of J_{crit} derived by individual authors Terzaghi, Knorre, Zamarin, Pavlovski and Istomina are compared with results of our research in LWS. In (Fig. 9) the J_{crit} values of individual authors are compared with the results of experimental research carried out at the LWS. Considerable differences are evident from the comparison. In practically all cases the theoretical J_{crit} values are higher than those obtained in experimental research, where the value $J_{crit} = 1$ was only rarely exceeded. The shortcoming of the theoretical values is that they do not take into account soil non-uniformity, non-homogeneity and anisotropy. The significant difference in case of experiments 3 and 4 is due to the different indication of the instant of “failure,” which in this case was assumed at the moment of washout of fine particles from the sandy-gravel matrix and a more significant increase in hydraulic conductivity k . This occurred at relatively small hydraulic gradients i.e. $J_{crit} < 0.2$; nevertheless, there was practically no deformation of the sample (grain skeleton).

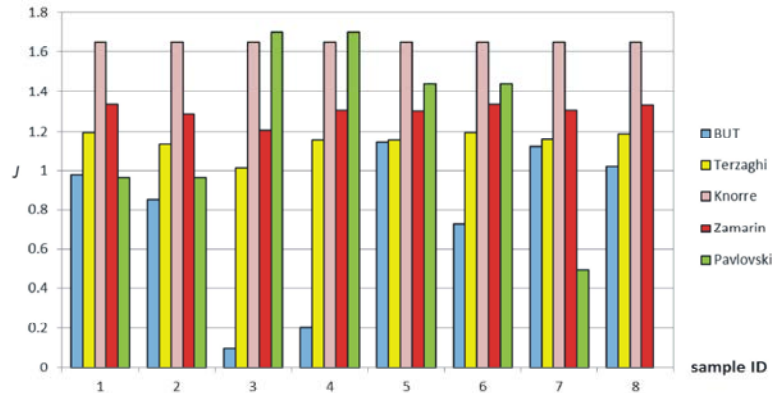


Fig. 9: Comparison of all theoretical values with BUT experiments.

CONCLUSIONS

Five types of non-coherent soils with different soil properties were subject to the experimental research. Four soil types were transported from the field near the city of Brno, one was prepared artificially in the laboratory by mixing two types of different soils in prescribed proportion (1:1).

The research stated with the determination of the geotechnical properties of soils. Further on the investigation of the critical hydraulic gradient was carried out within 8 experiments consisting of total amount 321 single tests. The resulting critical hydraulic gradients were subjected to the statistical analysis; the results were compared with the investigations of other authors. The analysis of the determination of the instant of the sample defiance was the part of the research [3].

It can be stated that the results of our analysis in experiments 1, 2, 5, 6, 7, 8 in terms of 5% percentile of critical hydraulic gradients (which can be regarded as the “characteristic value” are comparable with values derived by Terzaghi, Knorre and Zamarin. These results are also compatible with the results of Istomina [2] where the startup process of critical hydraulic gradient is the appearance of cracks in the compaction samples and boiling of the fine particles in the no compaction samples. Results were not compatible in experiments 3 and 4 due to the different chosen symptoms of sample deterioration.

Laboratory results in experiments 1, 2, 5, 6, 7, 8 indicate good agreement with Istomina’s conclusions for uniformity coefficient of soils $C_u < 5$ (experiments 1, 6, 7), where the moment of failure due to heave, internal erosion is sharp and evident. In non-uniform soils the results are much more different and are strongly dependent on the definition and identification of the failure instant. When the washout of fine particles from the sample is the

criterion, experiments show J_{crit} values which are considerably smaller than in Istomina’s envelope curve (see the results for experiments 3, 4,. When the failure criteria correspond to an overall collapse of the soil matrix, obtained critical gradients J_{crit} practically in all cases exceed the expected limit (see the results for $C_u < 27.32$ (experiments 8), this is especially true in the case of compacted soils.

The most important conclusion is that the research proved validity of the results from old research [Istomina 1957]... and that the characteristic value of critical hydraulic gradient can be taken from the envelope curve for given uniformity coefficient.

Further conclusions and recommendations coming from the research are as follows:

- The minimum recommended trials for statistical assessment is about 30, in our analysis about 40 tests were carried out at each experiment for each soil sample. Our recommendation based on experience from the testing is that optimum number of tests should be between 60 to 80.
- Our analysis proved log-normal probability density function as the best-fit distribution function for the measured values of critical hydraulic gradient.
- For the reading of critical hydraulic gradient the selection the instant of sample disruption is crucial. Our recommendation is that the flush-out of finest particle should not be considered as sample defiance. The instant of the sample disruption should be related to the movement of particles belonging to soil skeleton which consists of coarser grains.
- It would be desirable to continue with the systematic measurements of critical hydraulic gradients for different soils both compacted and loose.

REFERENCES

1. Khaddour, A., 2012. Evaluation of filtration stability in earth water structures by limit state method- Brno University Of Technology Faculty Of Civil Engineering Department Of Water Structures
2. Istomina, V.S., 1957. Filtration Stability of Soils Gostroizdat, Moscow-Leningrad
3. Řiha, J., 2008. Internal Erosion Incidents Cases from the Czech Republic. In EWG Internal Erosion in Embankment Dams, Obergurgl, Austria. Brno University of Technology. Institute of Water Structures. Czech Republic
4. Kratochvíl, J., *et al.*, 1991. Hydraulika, skriptum, Brno University of Technology. Institute of Water Structures. Czech Republic